


S18 Countertop Meter Replacement


Ensure that the dispenser is powered off and unplugged, the water and CO2 are turned off, and all taps are de-pressurized. This ensures that you can safely work on all components of the Dispenser.




1. Remove dispenser top by lifting up on the front. Remove ground wires underneath lid on back left.

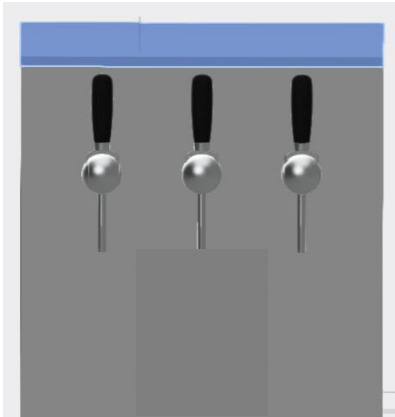


2. Remove the left side panel by lifting up and toward you.

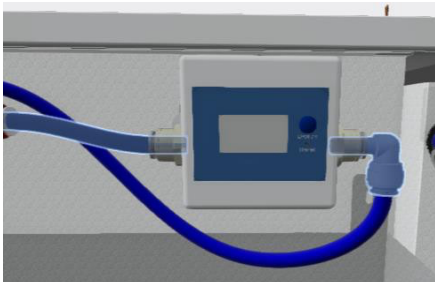


3. Disconnect Blue poly tube from left side of meter, and John Guest elbow from right side of meter.




4. Unscrew each white nylon screw nut to remove from dispenser.

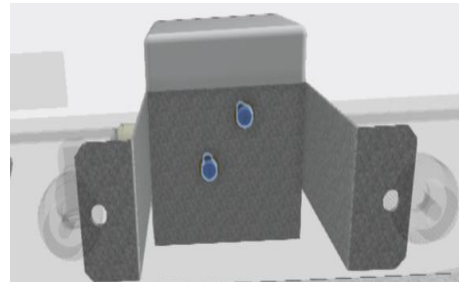

5. Remove meter bracket with two screws. Replace bracket on new meter. Tighten screw and secure to dispenser with two white nylon screw nuts.

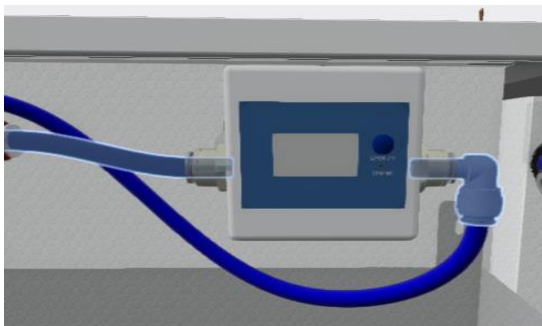

6. Re-connect poly tube and elbow to meter. Install 2-AAA batteries, and set to 2600 if new filter change is done, otherwise consult with a Wellsys service for meter setting.



7. Secure the side panel with screws and fit lid securely on top.

