

MODEL/PART DESIGNATIONS


BRAND NAME	DESCRIPTION	MODEL - PART NUMBER
<i>WL15-HCS</i>	<i>Waterlogic WL15-HCS</i> – Hot, Cold, and Sparkling	15-CT-HCS
	Serial Number Prefix: YYMM##### (##### denotes unit #)	
<i>WL15-HCA</i>	<i>Waterlogic WL15-HCA</i> – Hot, Cold, and Ambient	15-CT-HCA
	Serial Number Prefix: YYMM##### (##### denotes unit #)	

SPECIFICATIONS

<u>ITEM</u>	<u>WL15</u>
Water Connection	1/4" (OD) Quick Connect
Cold Water Temperature	3°C (38°F)
Cold Water Production	Up to 20 Liters per hour
Hot Water Temperature	85°C (185°F)
Hot Water Manual Reset Overload	97°C (206°F)
Hot Tank Capacity	1.2 Liters
Sparkling Tank Capacity	4 Liters
Max Service Pressure	40-60psi (275-414kPa) - Use Pressure Reducer
Rated Service Flow	1.89 L/min (0.5gal/min)
Environmental Temperature	2°-37°C (35°-100°F)
Max Power Consumption	650W
Refrigerant Gas	R-134a; 1.27oz
R134a Pressures	88psig - 186psig

SHIPPING SPECIFICATIONS

<u>ITEM</u>	<u>WL15</u>
Width/Depth/Height	13"/330mm (W) x 16.5"/419mm (D) x 16.5"/419mm (H)
Weight (dry)	62lbs/28kg
	<u>WL15 with Base Cabinet</u>
Width/Depth/Height	13"/330mm (W) x 16.5"/419mm (D) x 52.6"/1336mm (H)
Weight (dry)	93lbs/42kg

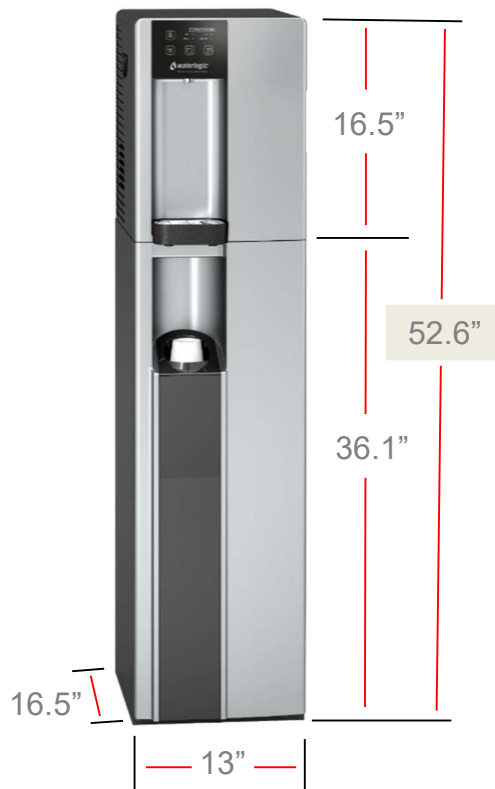

ELECTRICAL SPECIFICATIONS

<u>ELECTRICAL SUPPLY</u>	<u>120V/60Hz, 1PH</u>	<u>15 Amp Service</u>
<u>COMPONENT</u>	<u>POWER (approximate)</u>	<u>AMP DRAW (approximate)</u>
Heater	500W	4.2A
Compressor	100W	0.8A
Carbonator	50W	0.4A
WL15 TOTAL	650W	5.4A